

2 POLES - 3000/3600 tr/mn


DESCRIPTION			CARACTERISTIQUES MECANIQUES								CARACTERISTIQUES ELECTRIQUES					
CODE	TYPE	GR.	Moment statique (*) kgmm		Force centrifuge				Poids kg		Puissance nominale W		Courant max A		Ia/In	
			50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz 380 V	60 Hz 460 V	50 Hz	60 Hz
600182	CDX 36/2000	30	96.5	66.4	972	964	9.54	9.46	40.6	39.2	480	550	0.95	0.93	4.54	4.96
600183	CDX 36/3500	40	161	111	1625	1602	15.9	15.7	56.1	53.6	850	925	1.70	1.72	5.70	6.32
600184	CDX 36/4400	50	203	145	2045	2108	20.1	20.7	62.9	61.7	900	1095	1.80	1.85	6.60	7.19
600215	CDX 36/5070	60	222	159	2236	2300	21.9	22.6	82.0	79.0	1500	1606	3.40	3.20	7.10	8.60
600216	CDX 36/7060	70	316	221	3175	3200	31.1	31.4	107	103	2570	2570	6.00	5.00	4.70	5.60
600217	CDX 36/10500	80	469	329	4710	4760	46.2	46.7	144	139	3680	3680	7.50	6.60	6.20	7.00

(*) Moment dynamique = 2 x Moment statique

4 POLES - 1500/1800 tr/mn

DESCRIPTION			CARACTERISTIQUES MECANIQUES								CARACTERISTIQUES ELECTRIQUES					
CODE	TYPE	GR.	Moment statique (*) kgmm		Force centrifuge				Poids kg		Puissance nominale W		Courant max A		Ia/In	
			50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz 380 V	60 Hz 460 V	50 Hz	60 Hz
601149	CDX 18/2100	30	341	263	859	954	8.43	9.36	45.8	43.6	369	442	0.85	0.88	4.42	4.84
601150	CDX 18/3500	40	639	447	1608	1620	15.8	15.9	65.6	61.0	548	740	1.42	1.50	5.31	5.60
601151	CDX 18/4600	50	829	575	2086	2082	20.5	20.4	76.0	70.0	882	1105	1.90	1.90	4.84	5.46
601196	CDX 18/5140	50	962	674	2420	2444	23.7	24.0	85.0	75.0	882	1105	1.90	1.90	4.84	5.46
601187	CDX 18/5950	60	962	674	2420	2444	23.7	24.0	106	99.0	1305	1485	3.10	2.90	7.41	7.76
601188	CDX 18/8340	70	1526	1034	3840	3744	37.7	36.7	139	134	1839	1845	4.00	3.50	6.50	8.09
601189	CDX 18/10900	80	1990	1364	5007	4944	49.1	48.5	167	160	2100	2100	5.00	4.40	6.40	7.20

(*) Moment dynamique = 2 x Moment statique

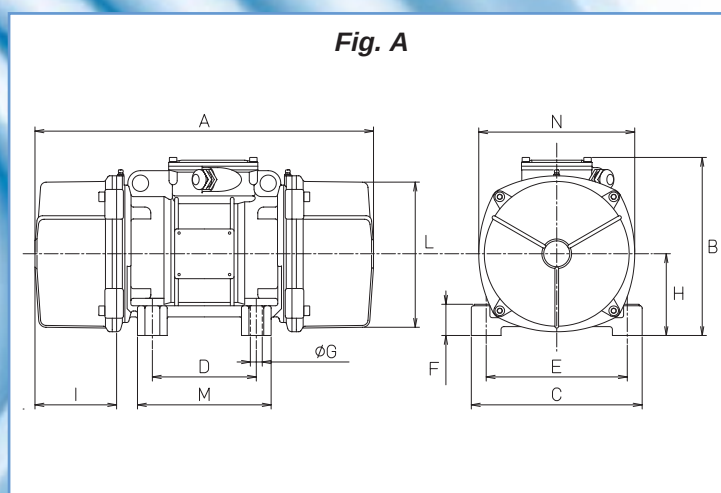

2 POLES - 3000/3600 tr/mn

CARACTERISTIQUES DIMENSIONNELLES (mm)

[illegible]

4 POLES - 1500/1800 tr/mn

CARACTERISTIQUES DIMENSIONNELLES (mm)

[illegible]